

### MP-26P-60

#### General Features


- Engine (PERKINS 404D-22G), Radiator 50°C max, belt driven fans, with safety guard
- 24V charge alternator
- Alternator (Stamford, Leroy Somer & Mecc Alte for option), single bearing alternator IP23, insulation class H/H
- Skid and vibration isolators
- Dry type air filter, fuel filter, oil filter
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, exhaust siphon, flange, industrial muffler

PHOTO FOR REFERENCE ONLY



#### Technical Data

Output Frequency	60 Hz
Rated Speed	1800RPM
Prime Power	24KVA/19.2KW
Standby Power	26KVA/20.8KW
Rated Voltage	440/254V
Phase	3
Power Factor	0.8
Fuel Consumption 100% Load	6.2L/Hr
Fuel Consumption 75% Load	4.8L/Hr
Fuel Consumption 50% Load	3.5L/Hr
Operation Altitude	≤1000m
Ambient Temperature	≤50°C

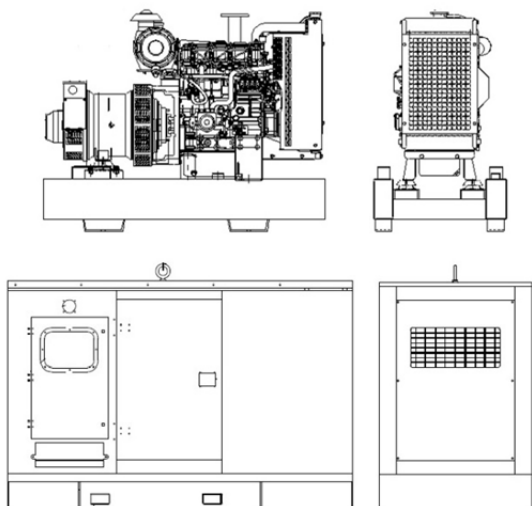

#### Dimension and Weight

Genset Type	Open Frame	Soundproof
Length(L) (mm)	1380	1900
Width(W) (mm)	650	910
Height(H) (mm)	1200	1450
Gross Weight (kg)	450	1070

**MP-26P-60****Engine Specification**

Manufacturer / Model:	PERKINS 404D-22G, 4-cycle
Air Intake System:	Natural
Fuel System:	Direct
Cylinder Arrangement:	4 in line
Displacement:	2.216L
Bore and Stroke:	84*100 (mm)
Compression Ratio:	23.3:1
Rated RPM:	1800rpm
Max. Standby Power at Rated RPM:	24.3KW
Governor Type:	Mechanical
Combustion air flow:	1.74m <sup>3</sup> /min
Cooling fan air flow:	55.2L/min
Exhaust Gas Flow:	4.76m <sup>3</sup> /min
Exhaust Temperature:	510°C
Max Back Pressure:	10.2kPa
Max Intake Restriction:	6.4kPa
Total Oil Capacity:	10.6L
Oil Consumption:	0.15% fuel consumption
Total Coolant Capacity:	7L
Thermostat:	82-95°C
Max Water Temperature:	112°C

**Alternator Specification**

Manufacturer / Model:	STAMFORD S0L2-M1
Number of Phase:	3
Connecting Type:	3 Phase and 4 Wires, "Y" type connecting
Number of Bearing:	1
Protection Grade:	IP23
Exciter Type:	Brushless, self-exciting
Insulation Class, Temperature Rise:	H/H
TIF:	< 50
THF:	< 2%
Voltage Regulation, Steady State:	≤ ± 1%
Alternator Capacity:	28KVA
Alternator Efficiencies:	88.6%
Air Cooling Flow:	0.126m <sup>3</sup> /s

# MP-26P-60

## Control System

### Standard Deepsea DSE6020 Auto Mains Failure Control Panel

- Manual or Auto Start Module for single genset applications. Designed to work with electronic and non-electronic engines, providing advanced engine monitoring and protection features.
- Includes a back-lit icon LCD display which shows the status of the engine at all times. Monitors engine speed, frequency, voltage and run hours and also displays the warning and shutdown status.
- Includes extensive outputs and inputs making this product ideal for a wide variety of applications. It can either be programmed using the front panel or by using DSE PC software.



### Optional Deepsea DSE7320 Auto Mains Failure Control Panel

- Auto Mains (Utility) Failure Control Module suitable for a wide variety of single genset applications.
- Displays warnings, shutdown and engine status info on the back-lit LCD screen, illuminated LEDs, remote PC. Monitors the mains (utility) supply. Includes USB, RS232 and RS485 ports for system expansion.
- Compatible with electronic and non-electronic engines and offer flexible inputs, outputs and engine protections to meet extensive industry requirements.
- Includes enhanced event and performance monitoring, remote communications to reduce engine wear. It can either be programmed using the front panel or by using DSE PC software.



### Optional Deepsea DSE8610 Auto Paralleling Control Panel

- Synchronizing Auto Start Control Module for multi-genset load share system, designed to synchronize up to 32 gensets including electronic and non-electronic engines.
- Monitors the genset and indicates operational status and fault conditions, automatically starting or stopping the engine on load demand or fault condition.
- System alarms are annunciated on the LCD screen, illuminated LED and audible sounder.
- Records 250 events log for maintenance. Extensive monitoring, metering and protection features are included as well as comprehensive communication and system expansion options.
- Using DSE PC Software allows alteration of the operational sequences, timers, alarms with all communication ports active.



**MP-26P-60****Options****Engine**

- Water Jacket Preheater
- Water Separator
- Oil Pump
- Oil Preheater
- Battery Charger

**Fuel System**

- Daily Fuel Tank
- External Fuel Tank
- Auto Fuel Filling System
- Fuel Level Sensor

**Control System**

- Auto Remote Control Panel
- AMF Function Control Panel
- Auto Paralleling Control Panel
- Auto Transfer Switch (ATS)
- ABB breaker

**Alternator**

- Anti Condensation Heater
- Permanent Magnet Generator
- Winding Temp Sensor

**Enclosure**

- Rainproof Type
- Soundproof Rental Type
- Mobile Type

**Available Voltages**

- 380V,400V,460V,480V(L-L)
- 208V,220V,230V,240V(L-L)

**Reference Standards**

**Generator Set:** ISO 8528, CE

**Engine:** ISO 3046, BS 5514, DIN 6271

**Alternator:** BS EN 60034, IEC34, BS5000, NEMA MG1-32, VDE 0530, CSA C22.2-100, AS1359

**Warranty**

Mega Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: A. 15 months, counted on the day Mega sold to the first buyer; B. One year after installation; C. 1000 running hours (accumulated); subject to the earlier one.

Service and spare parts are available from Mega Power or distributors in your location.